# CMED-707 (Special Order Fixtures)

120VAC LED DoB 7" Ceiling Cloud Series with Optional E26 Adapter for Keyless Lamp Holders

CMED-707PD (Special Order Fixtures)

120VAC LED DoB 7" Ceiling Cloud Series with Pull Chain Switch and Optional E26 Adapter for Keyless Lamp Holders
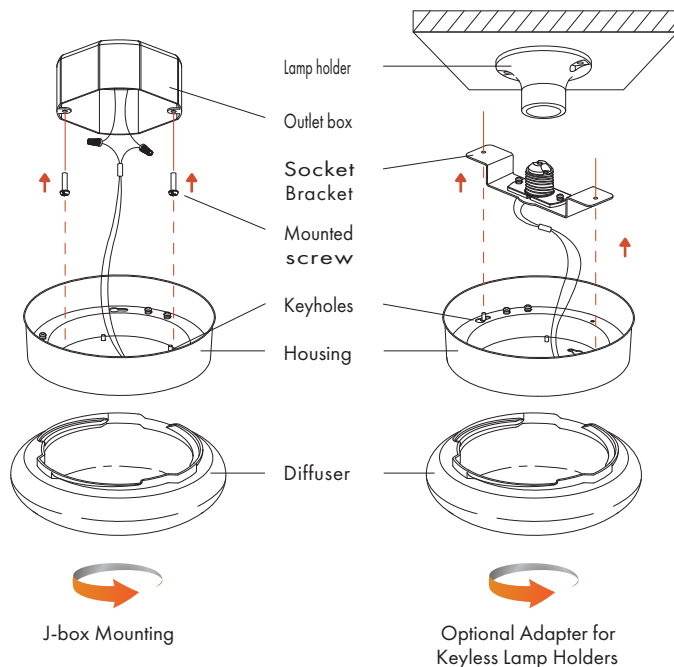
DoB
Driver on Board
AC Direct Module

Catalog #		Type	
Project			
Prepared by		Date	

LED

Dimmable

CA Title 24

ENERGY STAR

CMED-707

CMED-707PD

(with pull chain switch)

Lamp holder
Outlet box
Socket Bracket
Mounted screw
Keyholes
Housing
Diffuser

J-box Mounting

Optional Adapter for Keyless Lamp Holders

DESCRIPTION

The 7" LED DoB Ceiling Clouds are designed for use in new construction or replacing old fixtures over a 4" J-box. An optional Adapter for Keyless Lamp Holders is also available for easy installation. High efficacy 120VAC LED DoB (Driver on Board) Module (Campcell®) with integral triac dimming capability. The tool free, twist-on optical diffusing shade produces high lumen transmission and even illumination. Suitable for Wet Location.

DESIGN FEATURES

Electrical Connection;
- 120VAC direct LED, DoB module with integrated IC chip imbed on board.
- 10-100% triac dimming with most of leading and trailing edge incandescent & low voltage dimmer switches.
- Advanced driver circuit design (Pat. Pending) prevents damage to the LED module and switch from common inrush currents.
- Recommended for use max. 45 fixtures per run on a 600W max load dimmer switch. 23 fixtures per run on a 300W max load dimmer switch.
- Optional Adapter for Keyless Lamp Holders available for easy installation.

Limited Warranty
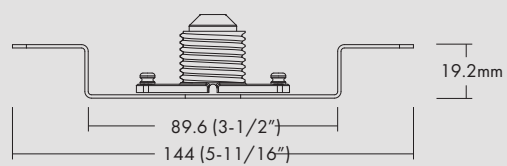- LED Module: 5 years/50K hours
- Product: 3 years

Listing
- cETLus Wet Location
- ENERGY STAR
- California Title 24

SPECIFICATION	
Input Voltage	120VAC
Wattage (+/-5%)	12 W
Lumen (+/-5%)	800 lm
Efficacy (LPW)	69 lm/W
CRI (Typical)	80, 90
CCT (Color +/-5%)	3000K
Dimming	Triac
Housing	White Painted Steel
Shade	High Impact White Translucent Plastic
Shade Diameter	6-7/8" (175mm)
Assembled Height	3-11/16" (94mm)
LED Module	5 yr/ 50K hr
Environment	Wet Location

Optional Keyless Lamp Holder Adapter

19.2mm

89.6 (3-1/2")

144 (5-11/16")

7MTLE26

Ordering Information

Model	-CRI	Color Temp.*	Finish*	-Options
CMED-707 = 7", 12W Ceiling Cloud	**-8** = 80 CRI	**30** = 3000K	**BLANK** = White	**- 7MTLE26** = E26 Adapter for Keyless Lamp Holders
	-9 = 90 CRI			
CMED-707PD = 7", 12W Ceiling Cloud W/ Pull Chain				

Example : **CMED-707-830-7MTLE26**   * Consult factory for other Color Temperatures and Finishes

LUM·TECH
LIGHTING