


# DLED-1565HPC

120V-277 VAC, 6" Pendant Mount, High Wattage  
LED COB Cylinder (Custom Made-to-Order)

Catalog #		Type
Project		Date
Prepared by		

## 6" LED Cylinder

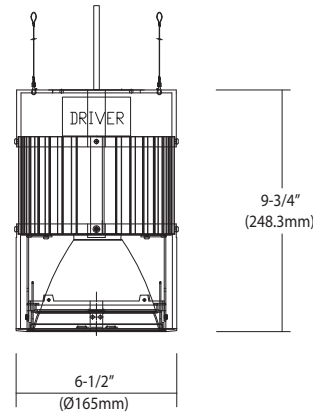

### DESCRIPTION

The Universal 120-277VAC, 6" aperture Cylinder provides high efficacy output with an integral driver. The optical diffuser produces high lumen transmission and even illumination. Excellent thermal management ensures reliable, long-life operation. c-CSA-us Damp Location.

SPECIFICATION	
LED Quantity	1EA (COB)
Input Voltage	120-277 VAC
Wattage (Typ)	100W
Lumen (Typ)	8,000 lm
Efficacy (LPW)	80 lm/W
Beam Angle	65°
CRI (Typical)	80, 90
Color (+/-5%)	2700K, 3000K, 3500K, 4000K, 5000K
Dimming	0-10V Dimming

### DESIGN FEATURES

- Excellent heat management with aluminum extrusion heat sink integrated with a high efficacy, LED COB module.
- 120V-277 VAC, 0-10V dimmable, high efficiency driver.
- Driver feature power factor >.90, THD <20% and has integral thermal protection to sense over temperature or internal failure.
- Driver mounts externally to the module, allowing future replacement if needed.
- 0-10V dimmable.
- Safety Cables Included.

#### Listing

- c-CSA-us Damp Location

#### Limited Warranty

- LED Module: 5 years/50K hours
- Product/Driver: 3 years

### Ordering Information (Custom Made-to-Order: Contact factory for lead-times)

Housing	-Pendant Stem Length	-Watts	-CRI	CCT	-Driver	-Housing Finish	-Reflector Finish
DLED-1565HPC = 120V-277 VAC, 6" Pendant Mount, Cylinder	-12 = 12 Inches -18 = 18 Inches -24 = 24 Inches -36 = 36 Inches -48 = 48 Inches *For Pendant Mount Only	-100 = 100W	-8 = 80 -9 = 90	27 = 2700K 30 = 3000K 35 = 3500K 40 = 4000K 50 = 5000K	-UZTD = 120-277V, 0-10V Dimming	-WH = White -BK = Black -BZ = Bronze -SI = Silver	-HC = Haze Clear -WH = White

Example : DLED-1565HPC-12-100-830-UZTD-WH-WH

\* Consult factory for other finishes, CCT or CRI options