

# LT23268, LT23269

120 VAC, 5-CCT Selectable, 3" and 4"  
 Regressed, Recessed Gimbal

Catalog #		Type
Project		Date
Prepared by		



3"



4"



# SPECIFICATIONS

## ELECTRICAL

	MODEL	DESCRIPTION	POWER	INPUT VOLTS	DIMMABLE	FREQUENCY	EFFICACY (LPW)	WATT REPLACEMENT	LIFETIME
3"	LT23268	LED8W/RDL3/GB/5CCT/FL	8	120V	YES	50/60Hz	75	50	50,000
4"	LT23269	LED12W/RDL4/GB/5CCT/FL	11	120V	YES	50/60Hz	83	75	50,000

## PHOTOMETRIC


MODEL	COLOR (CCT)	LUMEN	FLOOD	CRI
LT23268	2700K/3000K/3500K/4000K/5000K	600	40°	80
LT23269	2700K/3000K/3500K/4000K/5000K	1000	40°	80

## GENERAL




FINISH	DAMP LOCATION	IC RATED	COST/YR	ETL LISTED
WHITE	YES	YES	\$ 0.96	YES
WHITE	YES	YES	\$ 1.45	YES

# DIMENSIONS

3"

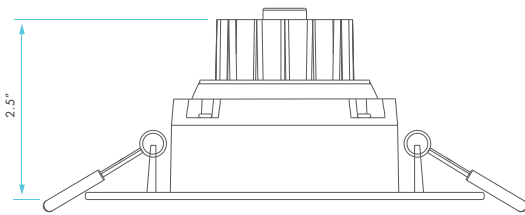

4"

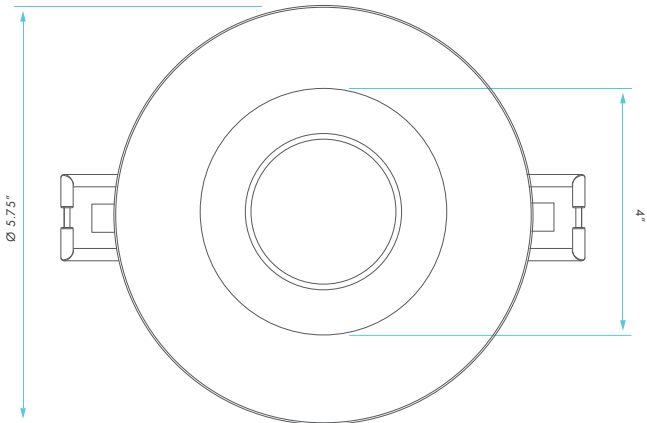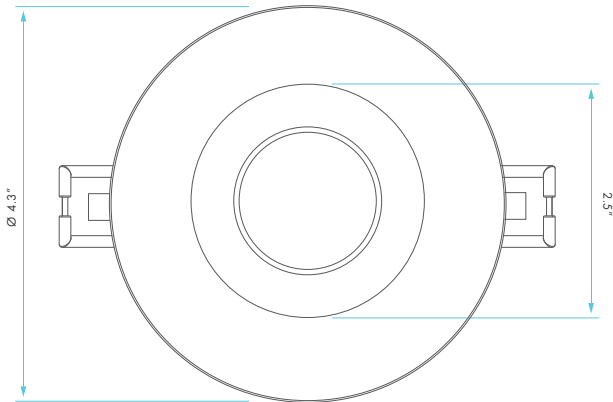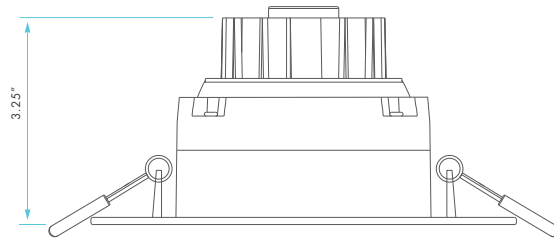

Cutout Diameter:  
3.37" (85 mm)

Cutout Diameter:  
4.87" (125 mm)