

## SURFACE MOUNTED LED CYLINDER INSTALLATION INSTRUCTIONS

**CAUTIONS - For your safety read and understand instructions completely before starting installation.**

**⚠ WARNING- Risk of fire or electric shock.**

1. Risk of Fire - Supply conductors (power wires) connecting the fixture must be rated minimum 90°C. If uncertain consult an electrician.
2. Risk of Electric Shock - Disconnect power at fuse or circuit breaker before installing or servicing.
3. Risk of Fire/Electric Shock - If not qualified, consult an electrician.

1. For your safety read and understand instructions completely before starting installation.
2. To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
3. Before attempting installation of any recessed fixture check your local electrical code.

### HOUSING INSTALLATION

1. Attach two mounted screws into outlet box leaving enough of screw exposed to engage keyholes in the top of housing (Fig. 1).

### ELECTRICAL CONNECTION

1. Provide electrical service according to the "National Electrical Code" or your local electrical code to the outlet box.
2. Connect supply wires to fixture wires and insulate with proper size wire nuts (not provided).
  - a.) Connect incoming ground wire (green or bare) to fixture ground wire (green or bare).
  - b.) Connect incoming common (white) wire to fixture common (white).
  - c.) Connect incoming hot (typically black) wire to fixture black wire.

### TRIM INSTALLATION

1. Attach reflector to LED module assembly with (2) screws through keyslots (Fig. 2).
2. Plug the female connector of LED module onto the male connector of the housing. (Fig. 2)
3. Push LED module assembly/reflector through the hole in housing, and position the legs of retaining spring under the bottom of housing.

Figure 1

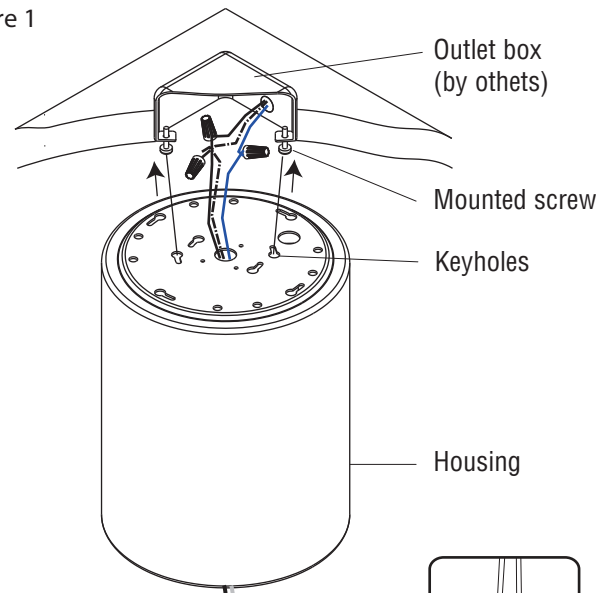


Figure 2

