


LT23590~5 Series

120 VAC, 3-CCT Selectable 4", 5", 6", 7" & 9"
Thin, Round and Square Surface Mount Fixtures

Catalog #		Type
Project		Date
Prepared by		

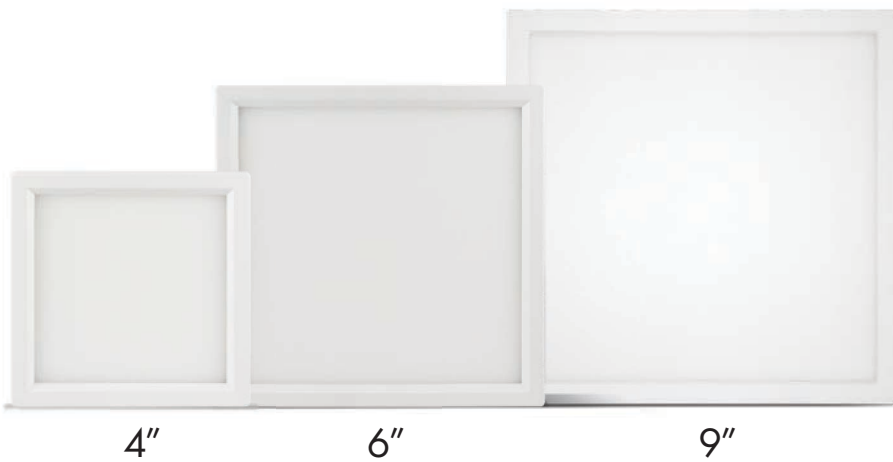

3 CCT SWITCH
FOR 4"- 9"



SPECIFICATIONS

ELECTRICAL

		MODEL	DESCRIPTION	POWER	INPUT VOLTS	DIMMABLE	EFFICACY	FREQUENCY	LIFETIME
4"	SQ	LT23591	120 VAC, 4", 10W, 3-CCT, Dimmable, White, Square	10W	120V	YES	60 L/W	50/60Hz	50,000
5"	RD	LT23590	120 VAC, 5", 10W, 3-CCT, Dimmable, White, Round	10W	120V	YES	60 L/W	50/60Hz	50,000
6"	SQ	LT23593	120 VAC, 6", 15W, 3-CCT, Dimmable, White, Square	15W	120V	YES	63 L/W	50/60Hz	50,000
7"	RD	LT23592	120 VAC, 7", 15W, 3-CCT, Dimmable, White, Round	15W	120V	YES	67 L/W	50/60Hz	50,000
9"	SQ	LT23595	120 VAC, 9", 18W, 3-CCT, Dimmable, White, Square	18W	120V	YES	67 L/W	50/60Hz	50,000
	RD	LT23594	120 VAC, 9", 18W, 3-CCT, Dimmable, White, Round	18W	120V	YES	67 L/W	50/60Hz	50,000

PHOTOMETRIC

MODEL	COLOR (CCT)	LUMEN	BEAM ANGLE	CRI
LT23591	3000K (Soft) / 4000K (Cool) / 5000K (Bright)	600	90°	80
LT23590	3000K (Soft) / 4000K (Cool) / 5000K (Bright)	600	90°	80
LT23593	3000K (Soft) / 4000K (Cool) / 5000K (Bright)	900	90°	80
LT23592	3000K (Soft) / 4000K (Cool) / 5000K (Bright)	900	90°	80
LT23595	3000K (Soft) / 4000K (Cool) / 5000K (Bright)	1200	90°	80
LT23594	3000K (Soft) / 4000K (Cool) / 5000K (Bright)	1200	90°	80

GENERAL

ENVIRONMENT	COST/YR	ETL LISTED	CERTIFICATIONS
WET LOCATION	\$ 1.20	YES	c-ETL-us; ENERGYSTAR
WET LOCATION	\$ 1.20	YES	c-ETL-us; ENERGYSTAR
WET LOCATION	\$ 1.81	YES	c-ETL-us; ENERGYSTAR
WET LOCATION	\$ 1.81	YES	c-ETL-us; ENERGYSTAR
WET LOCATION	\$ 2.17	YES	c-ETL-us; ENERGYSTAR
WET LOCATION	\$ 2.17	YES	c-ETL-us; ENERGYSTAR

DIMENSIONS

