




SEL-800-DR-AL

120/277 VAC, LED Edge-Lit, Double Face Exit/Emergency Sign (Red Letters)

Catalog #		Type
Project		Date
Prepared by		

EXIT SIGN

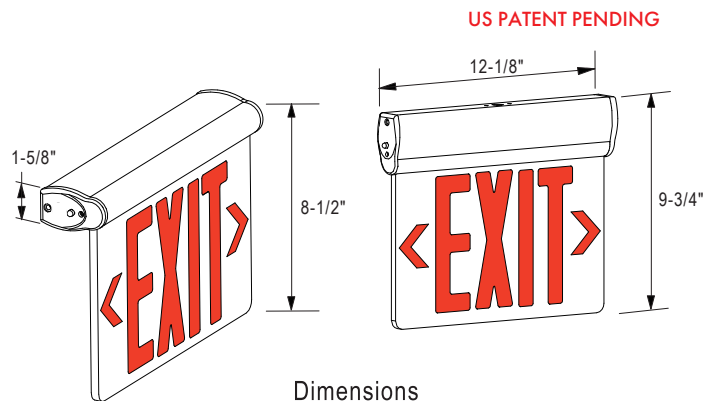

DESIGN FEATURES

◦ Housing

- Compact and decorative design.
- Aluminum housing with high grade acrylic panel.
- Replaceable acrylic EXIT panel.
- Removable directional indicators.
- Removable front cover for easy installation and battery maintenance.
- Letters 6" height with 3/4" stroke.
- Suitable for damp location.

◦ Mounting

- Wall or Ceiling mounting, sloped ceiling or high ceiling with tilt angle.
- Housing snaps to canopy with simple twist and locking tightly secure housing to canopy.

◦ Electrical

- 120/277VAC Dual voltage operation.
- Test switch and change rate indicator.
- Power consumption: 3 watts.

◦ Lamp

- Low consumption red or green LED lamp.
- LED lamps are operating in normal (AC input) and emergency (DC input) modes.

◦ Battery

- Ni-Cad battery delivers more than 90 minutes capacity to emergency lamps.
- 24 hours recharge after 90 minutes discharge.
- Low voltage battery disconnection-Preventing deep discharge damage to the battery.

SEL-800S	LED Edge-Lit Exit Sign, Single Face
SEL-800D	LED Edge-Lit Exit Sign, Double Faces

ORDERING INFORMATION

Item No.	Number of Faces	Lettering	Background	Housing color
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
SEL-800	- S : Single Face - D : Double Faces	- R : Red	- C : Clear - M : Mirror	- AL : Aluminum

Example : SEL-800-D-R-M-AL

12/14/2020