



# ICED95331S, DLED95331S

120-277VAC, 3.6" X 3.6" IC and Non-IC Type LED Square Architectural Downlight

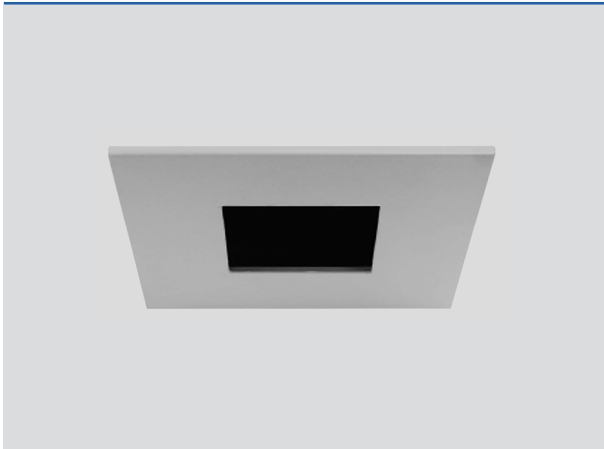

Test Specification			
[ ICED95331S-xx UZTD		TML252ST-xx-830N-WHWH ]	
LED Quantity	1 EA (COB)		
Input Voltage	120~277V		
Wattage (+/-5%)	<b>10W</b>	<b>14W</b>	<b>23W</b>
Lumen (+/-5%)	725	950	1,525
Efficacy (LPW) (+/-5%)	72	68	66
Luminaire Beam	24°	24°	25°
CCT (Color +/-5%)	2700K, 3000K, 3500K, 4000K		
CRI (Typical)	80, 90		
Dimming	0~10V, ELV & TRIAC		
LED Module	5 yr or 50K hr		
Environment	Damp Location & *optional Wet Location		

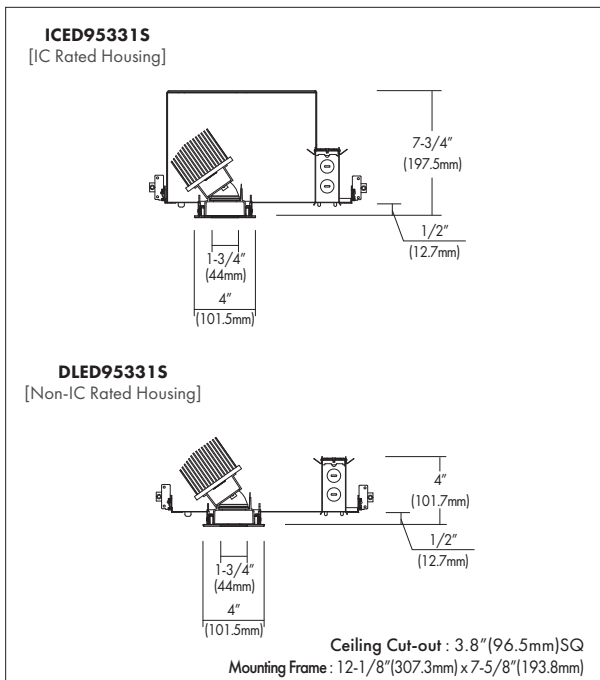

### Design Features

- Light-weight aluminum housing, adjusts for ceilings up to 1-1/4" thick.
- Driver is remotely installed onto the J-box to isolate it from the LED module.
- Dimming capability is standard with 0-10V dimmer switches.
- Multiple reflector distribution patterns available: pinhole trim with Narrow Spot (NS), Narrow beam (N), Medium beam (M), and Wide beam (W).
- Precision diecast aluminum trim frame painted and available with Trim or Trimless design with Drywall Mud Frame kit.
- Cold forged aluminum heat sink is painted for efficient heat dissipation.
- The ICED95331S luminaire is listed as Type IC and is suitable for direct contact with insulation.
- Certified to IESNA LM-79: Electrical and Photometric Testing for Solid State Lighting. LED chip set is LM80 compliant.
- cETLus Listed.

**Trims :** Various finishes available for straight (ST), Adjustable (AJ) and Shower Lens (SH) down lights. Optional Trimless Kits also available.



**TML252ST**  
- Straight fixed lamp


**TML252AJ**  
- Adjustable 0~30° tilt.

**TML256SH**  
- Fixed lamp position  
- Lens trim for shower or wet location option

### Option

#### TML-252-MUD

[ Trimless Drywall Mud Frame ]




Trimless Ceiling Cut-out: 4-1/4" (107mm) SQ

# ICED95331S, DLED95331S

120-277VAC, 3.6" X 3.6" IC and Non-IC Type LED Square Architectural Downlight

## PHOTOMETRIC REPORT\*

\* Contact Factory for IES File

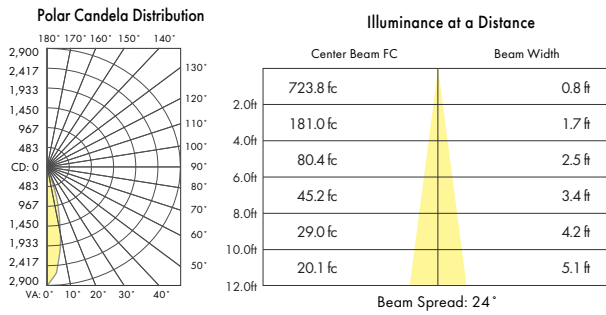

[TML252ST-10-830N]

## Ordering Information

### Housing

IC Housing:  
**ICED95331S**

Non-IC Housing:  
**DLED95331S**

### -Watts

-10 = 10W  
-14 = 14W  
-23 = 23W

### Driver\*

**UZTD** = 120~277V, with Triac, ELV  
& 0-10V Dimming

\*Option: Emergency (Non-IC only)

-EM = Emergency Battery Backup

### Trim/LED Kit\*

**TML252ST** = Straight  
**TML252AJ** = Adjustable  
**TML256SH** = Shower Lens

### -Wattage

-10 = 10W  
-14 = 14W  
-23 = 23W

### -CRI

-8 = 80  
-9 = 90

### Color Temp.\*\*

27 = 2700K  
30 = 3000K  
35 = 3500K  
40 = 4000K

### Beam Angle

Upper Reflector:  
NS = Narrow Spot 15°  
N = Narrow 24°  
M = Medium 38°  
W = Wide 60°

### -Finishes\*\*

-WH = White  
-BK = Black

\*Option: Sealed Lens

**WRL** = Wet Location  
**TML-252-MUD** = Trimless Drywall Mud Frame

\*\* Consult factory for other Color Temperatures and Finishes