

LT24950~8 Series

120 VAC, 4", 15W, Selectable 5-CCT,
Dimmable, Round or Square Trim Downlights

Catalog #		Type
Project		Date
Prepared by		



5 COLOR
OPTIONS

1 FIXTURE

4"




CCT

2700K 3000K 3500K 4000K 5000K

CHANGE



5 CCT
SWITCH

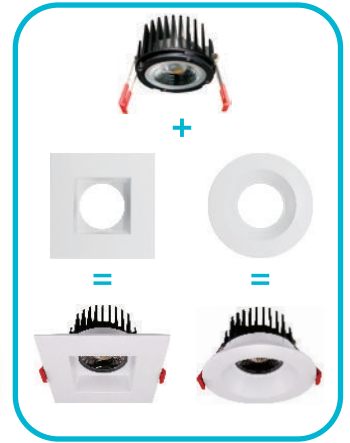

INTERCHANGEABLE ROUND AND SQUARE SMOOTH OR BAFLED TRIMS

3
Year
Warranty

CRI
80

LUMEN
1100

120V

WET LOCATION
RATED

DIMMABLE*


15
WATT

SPECIFICATIONS


ELECTRICAL								
MODEL	DESCRIPTION	POWER	INPUT VOLTS	DIMMABLE	EFFICACY (LPW)	FREQUENCY	LIFETIME	
4" LT2495X	120 VAC, 15W, 5-CCT, Dimmable, Round or Square Trim Downlight	15	120V	YES	73	50/60Hz	50,000	

PHOTOMETRIC					GENERAL		
MODEL	SELECTABLE CCT	LUMENS	BEAM ANGLE	CRI	COST/YR	ENVIRONMENT	CERTIFICATIONS
LT2495X	2700K (Warm) / 3000K (Soft) / 3500K (Natural) / 4000K (Cool) / 5000K (Bright)	1100	40°	80	\$ 1.81	WET LOCATION	c-ETL-us; ENERGYSTAR

DIMENSIONS

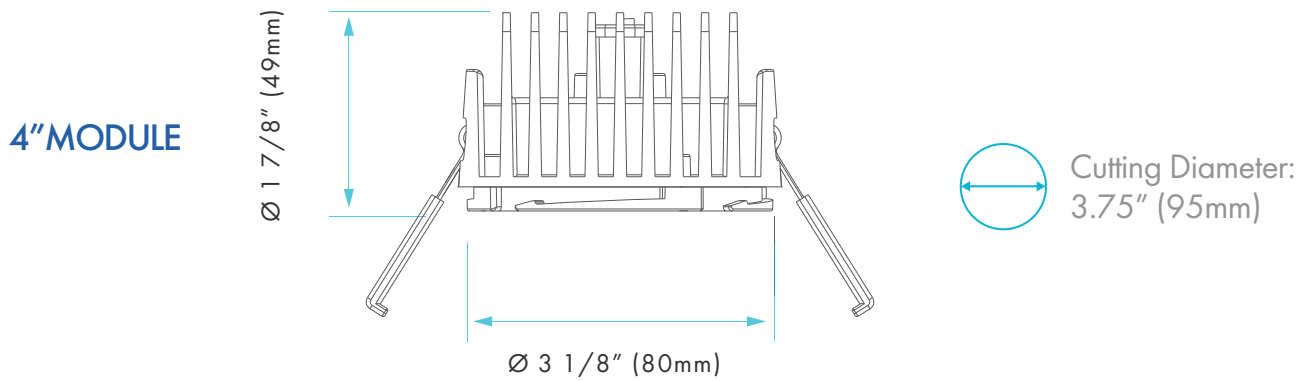

INTERCHANGEABLE TRIMS

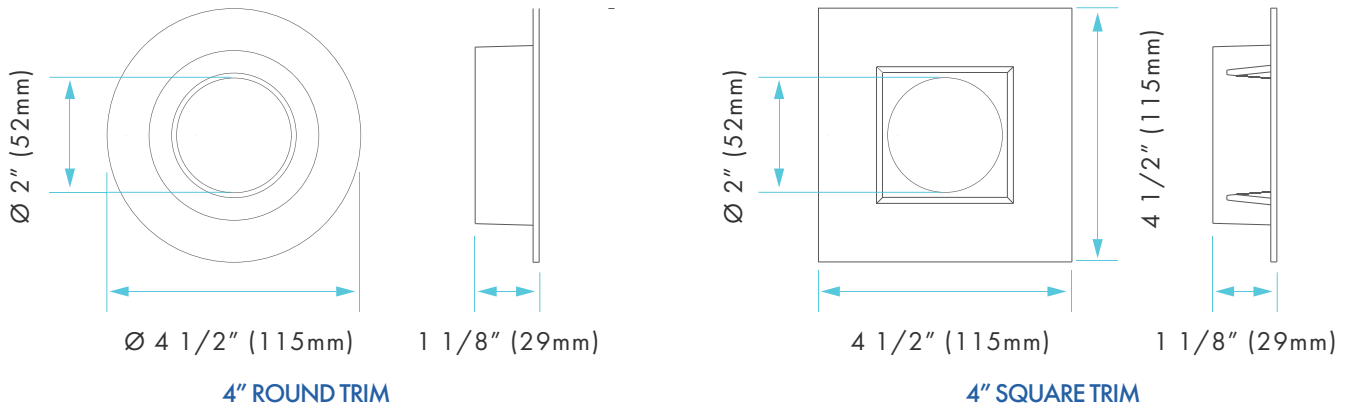

MODEL	DESCRIPTION	FINISH
LT24952	120 VAC, 4", 15W, 5-CCT, Dimmable, Round Trim Downlight	Smooth White
LT24953	120 VAC, 4", 15W, 5-CCT, Dimmable, Round Trim Downlight	Baffled White
LT24956	120 VAC, 4", 15W, 5-CCT, Dimmable, Round Trim Downlight	Smooth Black
LT24954	120 VAC, 4", 15W, 5-CCT, Dimmable, Square Trim Downlight	Smooth White
LT24955	120 VAC, 4", 15W, 5-CCT, Dimmable, Square Trim Downlight	Baffled White
LT24958	120 VAC, 4", 15W, 5-CCT, Dimmable, Square Trim Downlight	Smooth Black