

LT23790~6 Series

4", 5-6" Downlight Retrofit 5 CCT Select
Smooth, Baffled

Catalog #		Type
Project		Date
Prepared by		



4"




BAFFLED



SMOOTH

5 COLOR OPTIONS
1 FIXTURE

5-6"

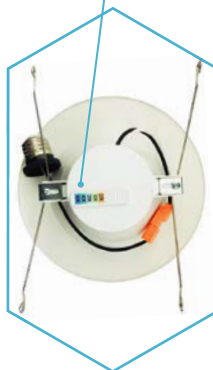

SPECIFICATIONS

ELECTRICAL

	MODEL	DESCRIPTION	POWER	INPUT VOLTS	DIMMABLE	FREQUENCY	LUMEN EFFICACY	WATT REPLACEMENT	LIFETIME
4"	BAFFLED LT23790	LED/DL4/5CCT/FL/B/RD	10	120V	YES	60Hz	75	60	50,000
	SMOOTH LT23791	LED/DL4/5CCT/FL/RD	10	120V	YES	60Hz	75	60	50,000
5-6"	BAFFLED LT23795	LED/DL5-6/5CCT/FL/B/RD	14	120V	YES	60Hz	79	90	50,000
	SMOOTH LT23796	LED/DL5-6/5CCT/FL/RD	14	120V	YES	60Hz	79	90	50,000


PHOTOMETRIC

MODEL	COLOR (CCT)	TEMP	LUMEN	CRI
LT23790	2700K/3000K/3500K/4000K/5000K	CCT SELECT	750	90
LT23791	2700K/3000K/3500K/4000K/5000K	CCT SELECT	750	90
LT23795	2700K/3000K/3500K/4000K/5000K	CCT SELECT	1100	90
LT23796	2700K/3000K/3500K/4000K/5000K	CCT SELECT	1100	90


GENERAL

DAMP LOCATION	BASE	COST/YR	ETL LISTED	ENERGY STAR	TITLE 24
YES	E26 ADAPTER	\$ 1.20	YES	YES	YES
YES	E26 ADAPTER	\$ 1.20	YES	YES	YES
YES	E26 ADAPTER	\$ 1.69	YES	YES	YES
YES	E26 ADAPTER	\$ 1.69	YES	YES	YES

DIMENSIONS

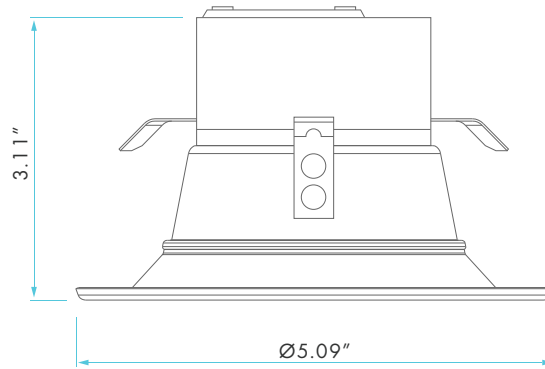

4"

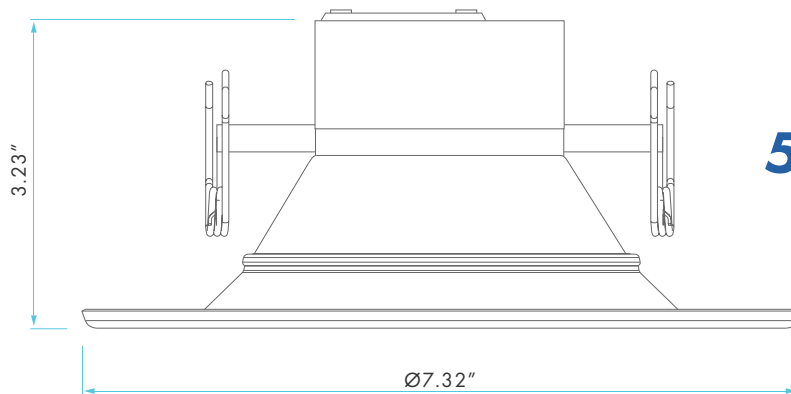

5-6"