CMJ-LT562L

120V LED Canopy with J-Box Mounted
Track Lighting - Large

Catalog #		Type
Project		Date
Prepared by		

The CMJ-LT562 series is a high-output LED luminaire that features an adjustable head allowing the optimum positioning of light within a 90° vertical head rotation and a 360° horizontal rotation. It has a modern cylindrical design with no exposed wiring and no separate power supply housing. It is made from premium die-cast aluminum. Available in black or white finish and muitple optics for different beam angles.

120V AC · DIMMABLE · 3SDCM · 360° · 90° · DRY INDOOR · L70 50,000 HOURS · 5 YEAR WARRANTY · cETLus Intertek

SPECIFICATIONS

INPUT VOLTAGE	120V AC 50/60Hz, 0.3A
WATTAGE	36 W
LUMENS	2700 Lm @4000K
CRI	90+
BEAM ANGLE	15º, 24º, 40º
DIMMING [1]	TRIAC/ELV Dimming
DIMENSIONS	3 7/8" Ø × 6" L x 7" Ext. (98 × 152 x 178 mm)
HORIZONTAL AIM	360°
VERTICAL AIM	90°
ENVIRONMENT	Indoor - Dry
CERTIFICATIONS	cETLus
LUMEN MAINTENANCE	50,000 hours
WARRANTY [2]	5 years

[1] Effectively dim down to 10%
[2] See published warranty terms for detailed information

COLOR TEMPERATURE

2700K · 3000K · 3500K · 4000K · 5000K

Warm White · Neutral White · Cool White

ORDERING INFO

SYSTEM	SERIES	CCT / CRI	BEAM ANGLE	FINISH
CMJ	LT562L			
CMJ - Canopy with J-Box Mounted	LT562L - 3 7/8" Ø	2790 - 2700K / 90 CRI 3090 - 3000K / 90 CRI 3590 - 3500K / 90 CRI 4090 - 4000K / 90 CRI 5090 - 5000K / 90 CRI	15D - 15° 24D - 24° 40D - 40°	BK - Black WH - White

TEL: 856-234-2211 FAX: 856-234-0881 www.lum-tech.com

TECHNICAL DRAWING

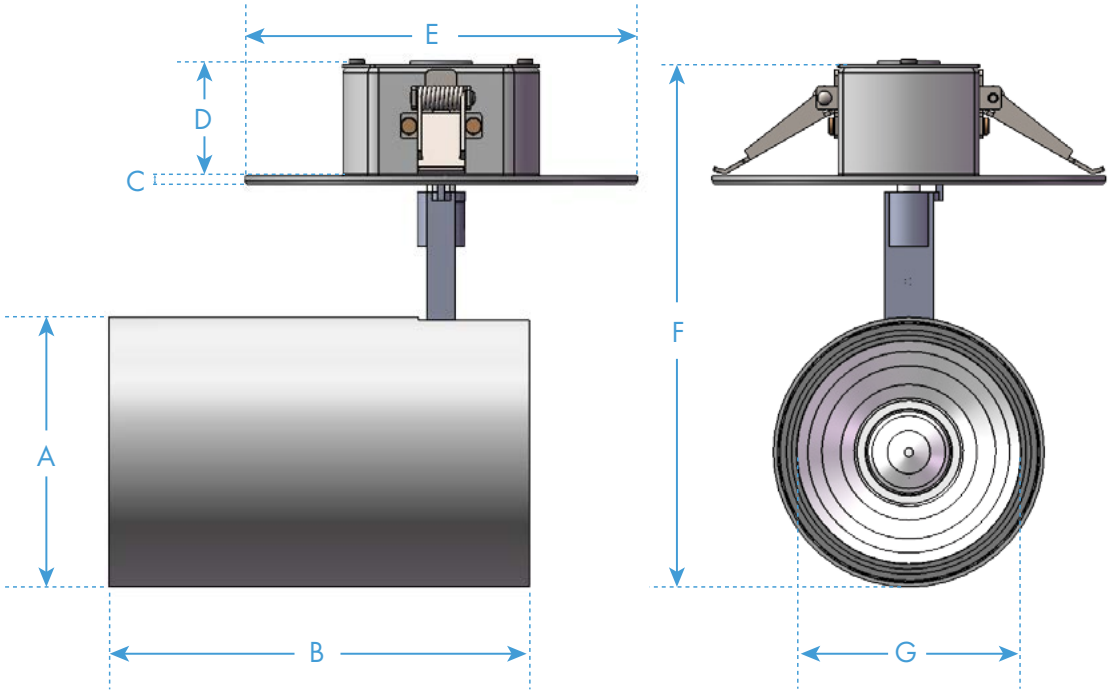

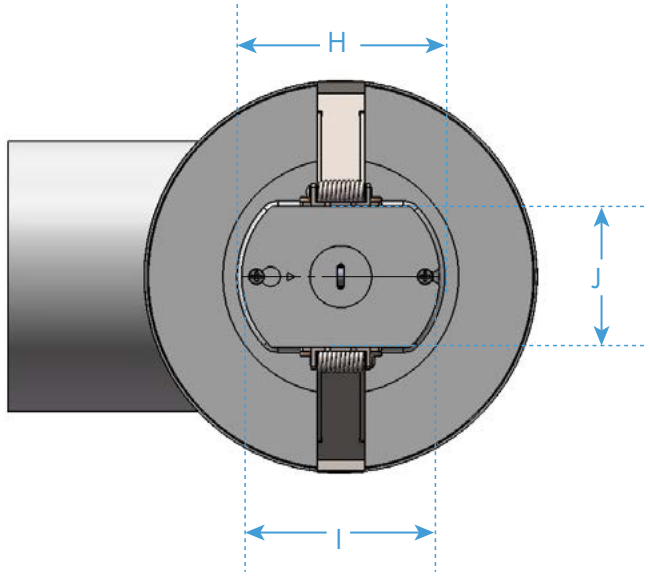

DIMENSIONS		
A	3 7/8" Ø	(98 mm)
B	6"L	(152 mm)
C	¼"	(6.35 mm)
D	1 5/8"	(42 mm) above ceiling
E	4 ¾" Ø	(121 mm)
F	7 3/8" H	(187 mm)
G	3 1/8" Ø	(80 mm)
H	3"	(72 mm)
I	2 ¾"	(70 mm)
J	2"	(51 mm)

COMPATIBLE DIMMERS

COOPER	SAL06P
LEVITON	6672, 6674, IPL06
LUTRON	TGCL-153PH, LGCL-153PH, MACL-153M, DVCL-153P, CTCL-153P
PASS & SEYMOUR	HCL453P