Catalog #		Type
Project		Date
Prepared by		

JWEB Series

120/277 VAC, Emergency Driver for CFL Lighting Fixtures

JWEB Series emergency ballasts for 2-Pin, 4-Pin, Twin, Triple, Quad tube compact fluorescent lamps

JWEB-650C2

JWEB-650C4

STANDARD FEATURES

- Durable heavy duty steel housing
- Maintenance-free, rechargeable nickel- cadmium battery
- 120/277 VAC dual voltage operation
- Provide LED indicator light and test switch
- Mounting options for perfect installation, (Double flex, No flex and single flex option)

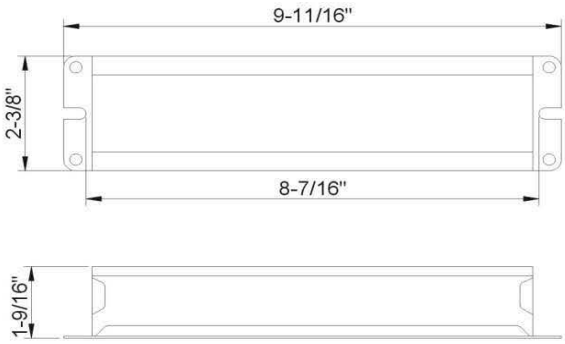

Dimensions

LAMP COMPATIBILITY

Item No.	Lumens	Lamps	Lamp Compatibility
JWEB-650C2	650	One Lamp	One 18W & 26W Quad Tube 2-pin lamp with integral starter
JWEB-650C4	650	One Lamp	One 11W-42W or Two 11-26W, 4 Pin Rapid Twin Triple, Quad Tube 2D and Straight

MOUNTING OPTION

Suffix	Shape	Description
-A (Double flex)		Provides two flexible conduits for junction box and test switch
-B (No flex)		Without flexible conduits for integral installation
-C (Single flex)		Provides one flexible conduits for test switch. Directly mounted one the junction box

TEL: 856-234-2211 FAX: 856-234-0881 www.lum-techlighting.com