


# SL-60

120-277 VAC, 8.4W max Emergency Driver for LED Lighting Fixtures

Catalog #		Type
Project		Date
Prepared by		

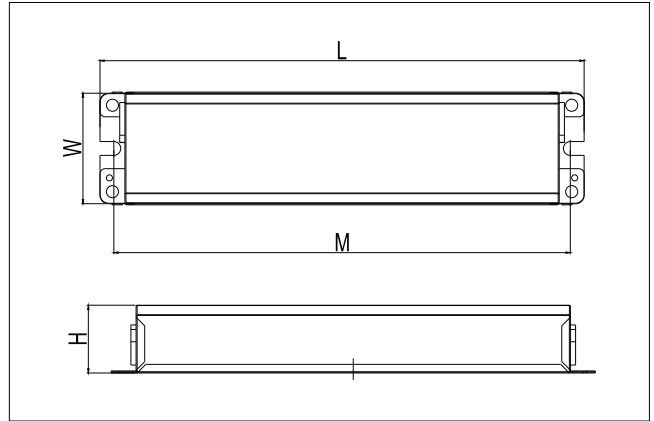

SL-60 Series LED emergency Driver is operating with LED fixture's AC driver and provide emergency lighting when normal power fails

## DIMENSIONS

Item No.	L	W	H
SL-60	11-1/16"	2-1/2"	1-1/2"

## Standard Features

- Ideal for LED lighting fixtures applications
- Durable heavy duty steel housing.
- Maintenance-free, rechargeable nickel- cadmium battery.
- 120-277 VAC universal voltage operation.
- Provide emergency lighting for 90 minutes .
- Max 8.4W output power.
- Flexible output voltage ranges from 3-60 VDC.
- Suitable for indoor and damp location.