LTLIN-HALO-D

LED Linear Halo Series
Halo Direct Pendant

Catalog #		Type
Project		Date
Prepared by		



Lum-Tech's LTLIN-HALO is a series of modern, seamless circular pendant lights designed to complement contemporary spaces. The collection is available as single-ring pendants in 2 ft, 3 ft, and 4 ft diameters, or as a striking three-tier configuration that stacks all three sizes together, paired with a specially ordered canopy.

Both color temperature and wattage are field adjustable via integrated toggle switches located in the canopy, allowing users to easily select—and later change—between 3000K, 3500K, and 4000K, as well as three levels of brightness.

120 - 277V AC | 0-10V DIMMABLE | DRY INDOOR | L70 50,000 HOURS | 5 YEAR WARRANTY | cETLus Intertek

SPECIFICATIONS

INPUT VOLTAGE	UNIVERSAL 120-277V AC
LUMENS	2FT 40W @ 3000K: 5200Lm
	3FT 60W @ 3000K: 7800Lm
	4FT 80W @ 3000K: 10400Lm
CRI	90+
DIMMING [1]	0-10V

DIMENSIONS	2"W x 2-5/8"H x Ø23-1/2" / Ø36-1/2"/ Ø47-1/2"
ENVIRONMENT	INDOOR DRY
CERTIFICATIONS	cETLus
LUMEN MAINTENANCE	50,000 hours
WARRANTY [2]	5 years

[1] Effectively dim down to 5%
[2] See publised warranty for details

PERFORMANCE

2FT Ø23-1/2"

COLOR TEMPERATURE	20W LUMEN	30W LUMEN	40W LUMEN	AVG. EFFICACY	CRI
3000K	2760 Lm	3990 Lm	5200 Lm	133 Lm/W	90+
3500K	2840 Lm	4140 Lm	5400 Lm	138 Lm/W	90+
4000K	2760 Lm	3990 Lm	5200 Lm	134 Lm/W	90+

3FT Ø35-1/2"

COLOR TEMPERATURE	40W LUMEN	50W LUMEN	60W LUMEN	AVG. EFFICACY	CRI
3000K	5520 Lm	6650 Lm	7800 Lm	133 Lm/W	90+
3500K	5680 Lm	6900 Lm	8100 Lm	138 Lm/W	90+
4000K	5520 Lm	6650 Lm	7800 Lm	134 Lm/W	90+

4FT Ø47-1/2"

COLOR TEMPERATURE	60W LUMEN	70W LUMEN	80W LUMEN	AVG. EFFICACY	CRI
3000K	8280 Lm	9310 Lm	10400 Lm	133 Lm/W	90+
3500K	8520 Lm	9660 Lm	10800 Lm	138 Lm/W	90+
4000K	8280 Lm	9310 Lm	10400 Lm	134 Lm/W	90+

[3] +/- 10%

ORDERING INFO

MODEL	SIZE		FINISH
LTLIN-HALO-D-	24-40W (2FT 40W)	DSW1 (3CCT selectable)	WH - WHITE BK - BLACK

MODEL	SIZE		FINISH
LTLIN-HALO-D-	36-60W (3FT 60W)	DSW1 (3CCT selectable)	WH - WHITE BK - BLACK

MODEL	SIZE		FINISH
LTLIN-HALO-D-	48-80W (4FT 48W)	DSW1 (3CCT selectable)	WH - WHITE BK - BLACK

TEL: 856-234-2211 FAX: 856-234-0881 www.lum-tech.com

DIMENSIONAL DRAWINGS

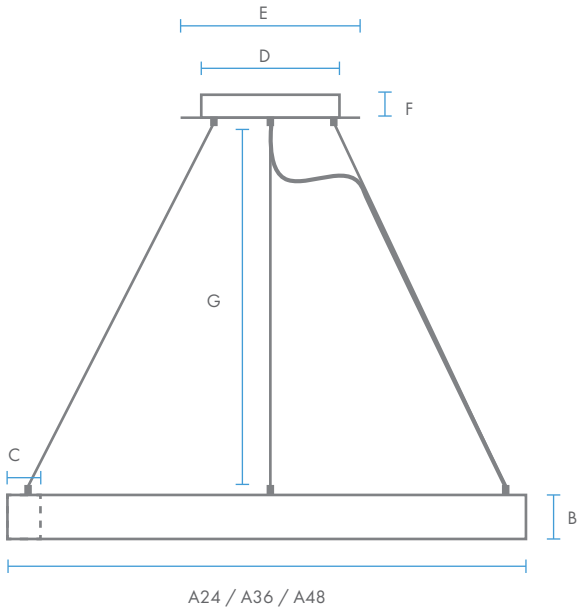

DIMENSIONS

A24	23-1/2″	597mm
A36	35-1/2″	902mm
A48	47-1/2″	1207mm
B	2-5/8″	67mm
C	1-7/8″	48mm Aperture
D	7-3/4″	197mm
E	9-1/2″	242mm
F	1-3/8″	35mm
G	240″	6097 mm Cable length

STACKING CONFIGURATION

Hang 3 sizes LTLIN-HALO fixtures on a single canopy

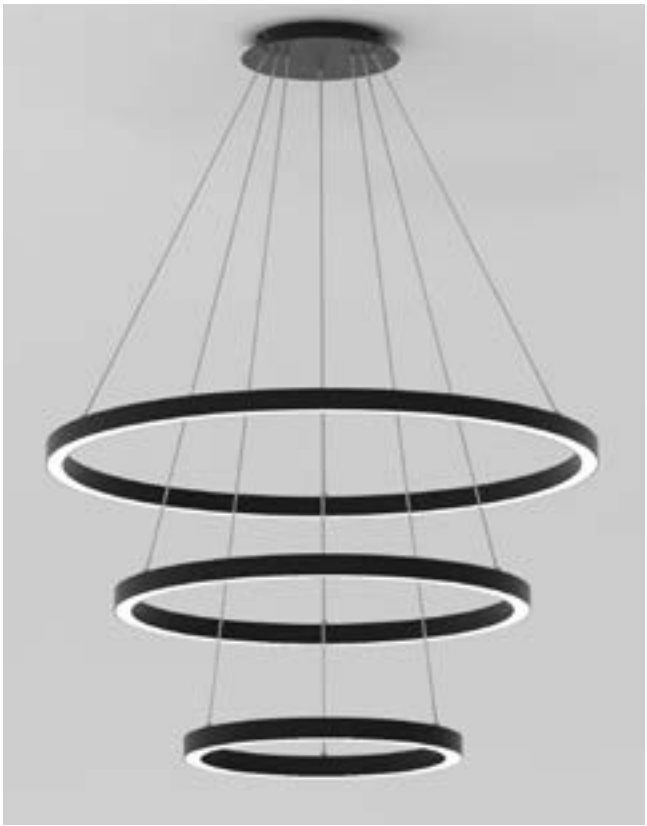

MULTI-TIERS FIXTURE

LTLIN-HALO-D-180W-DSW1-3FX- FINISH

WH - WHITE
BK - BLACK