


# LT23831~5 Series

120 VAC, Wet Rated, 4", 6", 8" Selectable CCT, DoB  
LED Surface Mount Disks



Catalog #		Type
Project		Date
Prepared by		

**CCT Selectable**  
**3000K, 4000K, 5000K**



**LT23831**  
**Dimmable 4" Disk**



**LT23833**  
**Dimmable 6" Disk**



**LT23835**  
**Dimmable 8" Disk**



**CCT Selection**  
**Switch**

## DESCRIPTION

The LT238 Series fixtures are 120 VAC thin surface mount disks that allow the contractor to select one of three different CCT colors. This heavy-duty aluminum housing is painted with a durable white, powder coat finish for excellent heat dissipation. These dimmable, high efficacy DoB, LED fixtures have a 3-Year Warranty and are Suitable for Wet Locations. c-ETL-us and ENERGY STAR Certified.

## DESIGN FEATURES

- 120VAC LED Power Supply on-board with state-of-the-art customized IC chip (DoB).
- Heavy gauge Aluminum Frame in White powder coat finish.
- High impact, Textured Translucent Twist and Lock Plastic Lens.
- Selectable CCT: 3000K (WW), 4000K (NW), 5000K (CW) at 80 CRI.
- Dimmable with most Triac & ELV dimmer switches.
- Easy mounting via J-Box Mounting System

### Limited Warranty




- 3 years

### Listing

- c-ETL-us Wet Location
- ENERGY STAR

SPECIFICATION			
Model	<b>LT23831</b>	<b>LT23833</b>	<b>LT23835</b>
Input Voltage	120 VAC 60 Hz		
Lens	Textured Translucent Plastic		
Finish	White Powder Coat Finish		
Beam	100°		
CRI	80		
Dimming	Most Triac & ELV dimmers		
Environment	Wet		
CCT	Selectable: 3000K, 4000K, 5000K		
Diameter	4"	6"	8"
Wattage	10W	15W	27W
Lumens	600 lm	1,000 lm	2,000 lm
Efficacy	60 lm/W	67 lm/W	74 lm/W

Approved Dimmers
* Lutron Skylark SEL-VB-300P (ELV)
* Lutron Maestro MAELV-600 (ELV)
* Lutron Nova T NTELV-300 (ELV)
* Leviton IPE04-1L (ELV)
* Lutron Skylark S-600 (Incandescent)
* Lutron Diva DVCL-253P (CFL/LED bulbs)
* Lutron Ariadni AYCL-253P (CFL/LED bulbs)
<b>Consult tech. service or factory for additional dimmers</b>

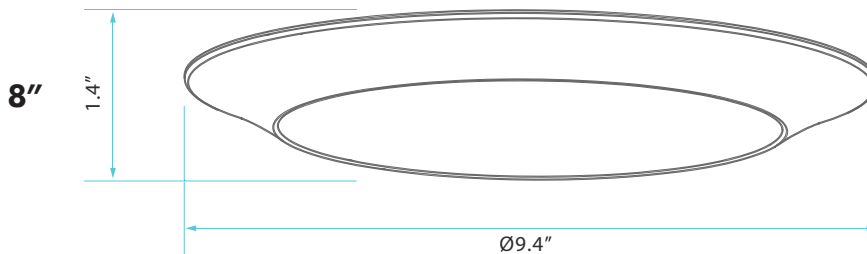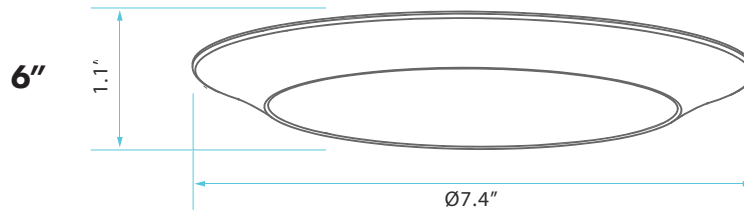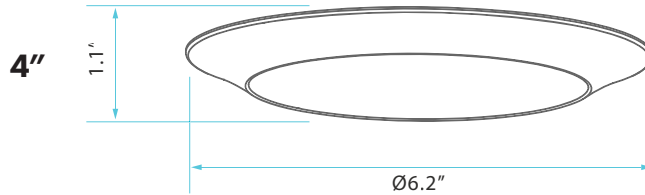

## Ordering Information

### Model

**LT23831** = 120 VAC, 10 W 4" Selectable CCT, Dimmable DoB LED Surface Mount Disk

**LT23833** = 120 VAC, 15 W 6" Selectable CCT, Dimmable DoB LED Surface Mount Disk

**LT23835** = 120 VAC, 27 W 8" Selectable CCT, Dimmable DoB LED Surface Mount Disk