RTF4

120VAC LED 4", Low Profile Surface Mount Fixture

DoB
Driver on Board
AC Direct Module

Catalog #		Type
Project		Date
Prepared by		

LED

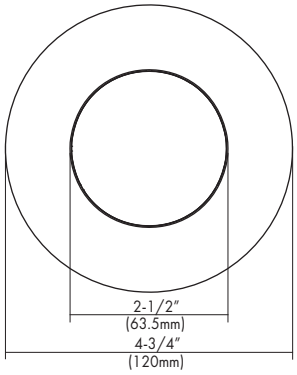

Dimmable

CA Title 24

DESCRIPTION

The RTF4 is a compact 4", Surface Mount, 120VAC DoB LED fixture and is designed for flush mounting onto ceilings. It is easily installed onto a standard 4" J-Box with the included twist and lock mounting bracket. Lumen output and distribution is comparable to a 65 watts incandescent lamp. ENERGY STAR qualified. For use in temperatures up to 40° (104°F). Suitable for Wet Locations.

DESIGN FEATURES

- 120V DoB LED module with integrated IC chip imbedded on board with 10-100% Triac dimming with most of leading and trailing edge dimmer switches.
- Circuit designed to protect against Inrush Current Surges.
- Recommended for use max. 30 fixtures per run on 600W loaded dimmer switches and 15 lamps per dimmer switches 300W loaded.
- Available in 3000K color temperature.
- Suitable for Wet Locations.

SPECIFICATION	
Input Voltage	120VAC
Diffuser Diameter (D)	2-1/2"
Overall Diameter (L)	4-3/4"
Depth (H)	7/8"
LED Wattage	7W
Lumen	540 lm (80CRI)
Efficacy (LPW)	77 lm/W
Beam Angle	100°

J-box Mounting



Listing

- cCSA-us Certificated
- California Title 24
- Wet Location

Limited Warranty

- LED Module: 5 years/50K hours

Ordering Information

Housing	-Watts	-CRI	Color Temp.*	Finish
RTF4	**-7** = 7W	**-8** = 80 CRI **-9** = 90 CRI	**30** = 3000K	**WH** = White **BK** = Black

Example : **RTF4-7-830-WH**

* Consult factory for other Color Temperatures and Finishes

TEL: 856-234-2211 FAX: 856-234-0881 www.lum-tech.com

LUM-TECH LIGHTING