LT23310~2 Series

2", 3", 4" Regressed Gimbal
LED Spotlight Canless

Catalog #		Type
Project		Date
Prepared by		

2"

LT23310

6W | 400 LUMENS

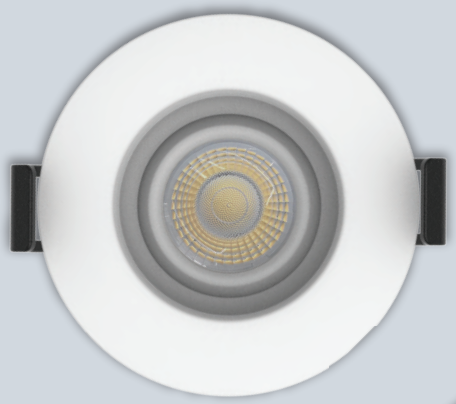

30º
360º
GIMBAL

3"

LT23311

9W | 730 LUMENS

4"

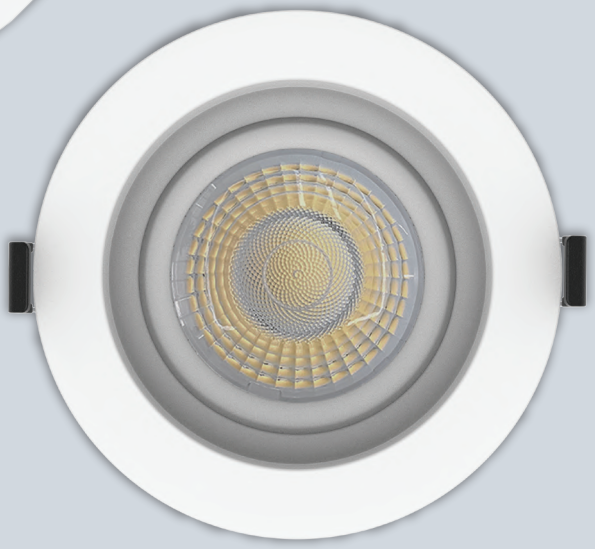

LT23312

15W | 1250 LUMENS

CRI 90

COLOR SELECTABLE

2700K | 3000K | 3500K | 4000K | 5000K

30° 360° GIMBAL

DIMMABLE TRIAC 10%-100%

120V

IC RATED

WET LOCATION RATED

5 YEAR WARRANTY

ELECTRICAL

	MODEL	DESCRIPTION	POWER	INPUT VOLTS	EFFICACY	FLOOD	LIFETIME	COST/YR
2"	LT23310	LED6W/RDL2/GB/5CCT/RD/WT	6	120V	66	38º	50,000	$ 0.72
3"	LT23311	LED9W/RDL3/GB/5CCT/RD/WT	9	120V	83	38º	50,000	$ 1.08
4"	LT23312	LED15W/RDL4/GB/5CCT/RD/WT	15	120V	83	38º	50,000	$1.80

TEL: 856-234-2211 FAX: 856-234-0881 www.lum-tech.com

PHOTOMETRIC

MODEL	DESCRIPTION	COLOR (CCT)	TEMP	LUMEN	CRI	ETL	TITLE 24	ENERGY STAR	PLATE (KNOCKOUT)
LT23310	LED6W/RDL2/GB/5CCT/RD/WT	2700K/3000K /3500K/4000K/5000K	CCT SELECT	400	90	YES	YES		LT41004 (#0) LT41006 (#0) LT41010 (L0) LT41011 (#0)
LT23311	LED9W/RDL3/GB/5CCT/RD/WT	2700K/3000K /3500K/4000K/5000K	CCT SELECT	730	90	YES	YES	YES	LT41002 (#0) LT41006 (#1)
LT23312	LED15W/RDL4/GB/5CCT/RD/WT	2700K/3000K /3500K/4000K/5000K	CCT SELECT	1250	90	YES	YES	YES	LT41002 (#1) LT41006 (#3) LT41010 (R1) LT41011 (#4)

COMPATIBILITY

COMPATIBLE WITH:

LT35126
Emergency
LED Driver

LT41004
New Construction
Mounting Plate



KNOCKOUT SIZE	
#0	Ø2.125" (Ø54 mm)
#1	Ø2.83" (Ø72 mm)
#2	Ø3.75" (Ø95 mm)
#3	Ø5.19" (Ø132 mm)

LT41006
New Construction
Mounting Plate

KNOCKOUT SIZE	
#0	Ø2.12" (Ø54 mm)
#1	Ø3.15" (Ø80 mm)
#2	Ø3.75" (Ø95 mm)
#3	Ø4.25" (Ø108 mm)
#4	Ø5.25" (Ø132 mm)
#5	Ø6.25" (Ø159 mm)

LT41011
New Construction
Mounting Plate



KNOCKOUT SIZE	
#0	Ø2.48" (Ø63 mm)
#1	Ø2.83" (Ø72 mm)
#2	Ø3.34" (Ø85 mm)
#3	Ø3.74" (Ø95 mm)
#4	Ø4.25" (Ø108 mm)

LT41002
New Construction
Mounting Plate

KNOCKOUT SIZE	
#0	Ø3.14" (Ø80 mm)
#1	Ø4.33" (Ø110 mm)
#2	Ø6.29" (Ø160 mm)

LT41010
New Construction
Mounting Plate

KNOCKOUT SIZE	
#L0	Ø2.12" (Ø54 mm)
#L1	Ø2.83" (Ø72 mm)
#L2	Ø3.75" (Ø95mm)



KNOCKOUT SIZE	
#R0	Ø3.25" (Ø82 mm)
#R1	Ø4.33" (Ø110 mm)
#R2	Ø5.25" (Ø132mm)
#R3	Ø6.25" (Ø160 mm)

DIMENSIONS

2"

CUTOUT: Ø 2.16"

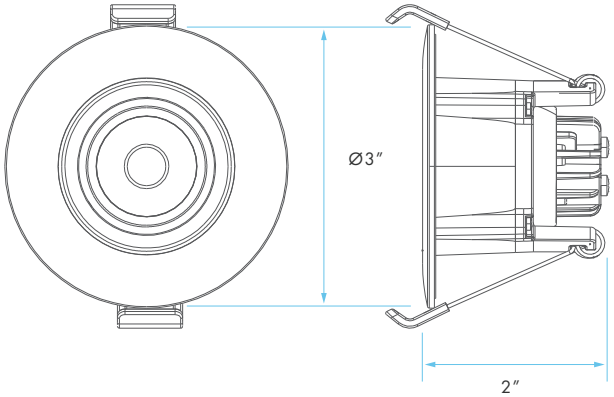

DIMENSIONS

3″

CUTOUT: Ø3″

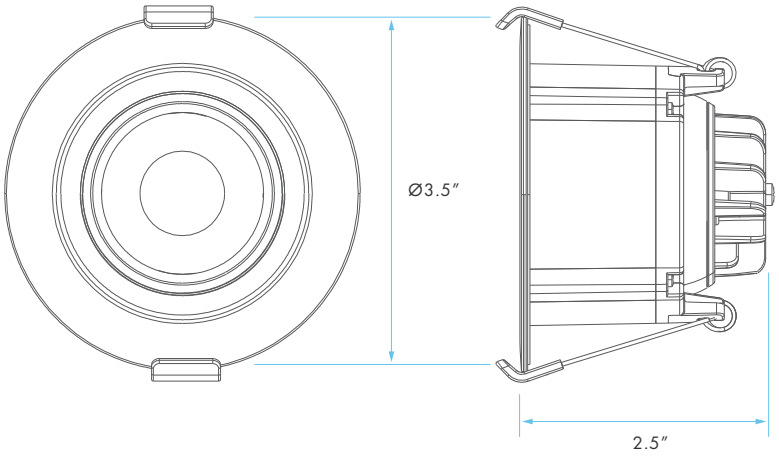

4″
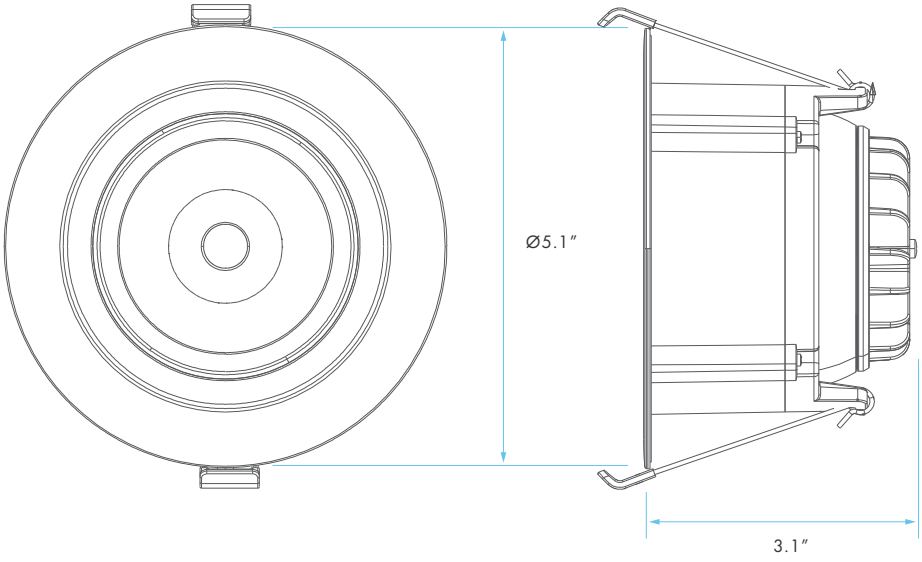
CUTOUT: Ø4.31″